



Servo-Electric Grippers

EN-2022.09

DH-ROBOTICS

DH-Robotics is a high-tech company which focus on providing core components for industrial intelligent manufacturing scenarios. Based on the self-developed precision force control direct drive technology, we provide customers in various industries around the world with diversified electric grippers and precision motion products to reduce production costs, improve production efficiency, and achieve intelligent manufacturing.

Our Support System



R&D System



New Technology



Innovation



R&D



Engineering Management



Sales Network



Projects Assessment



Training



Quality Supervision



After-sales Service



Manufacturing



Quality System



Stock Management



Supply Management



Manufacturing

CONTENTS

Applications	5
Selection Reference	8
Products Brief Parameters	10

PGE Series Slim-type Electric Parallel Gripper



PGE-2-12	14
PGE-5-26	15
PGE-8-14	16
PGE-15-10	17
PGE-15-26	18
PGE-50-26	19
PGE-100-26	20

RGI Series Electric Rotary Gripper



RGI-35-12	22
RGI-35-14	23
RGI-35-30	24
RGI-100-14	25
RGI-100-22	26
RGI-100-30	27

RGD Series Direct Drive Rotary Gripper



RGD-5-14	29
RGD-5-30	30
RGD-35-14	31
RGD-35-30	32

PGI Series Electric Parallel Gripper



PGI-140-80	34
------------	----

PGS Series

Miniature Electro-
magnetic Gripper



PGS-5-5	36
---------	----

PGC Series

Electric Collaborative
Parallel Gripper



PGC-50-35	38
PGC-140-50	39
PGC-300-60	40

AG Series

Electric Adaptive Gripper



AG-160-95	42
AG-105-145	43
DH-3	44

CG Series






Electric Centric Gripper



CGE-10-10	46
CGI-100-170	47
CGC-80-10	48

Applications in Cutting-edge Industries

More solutions and applications, please visit www.dh-robotics.com

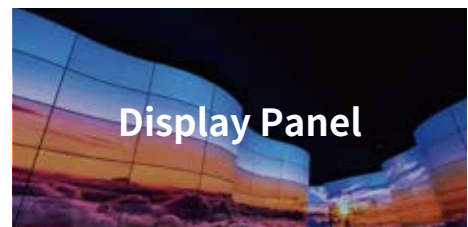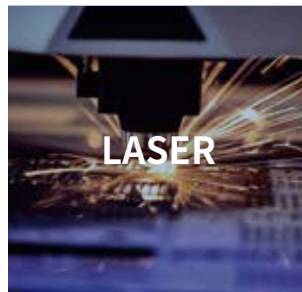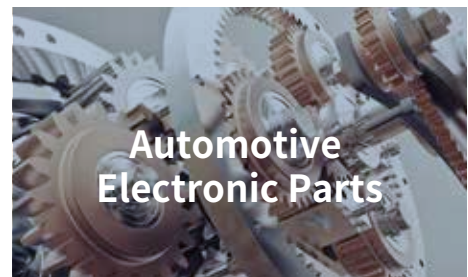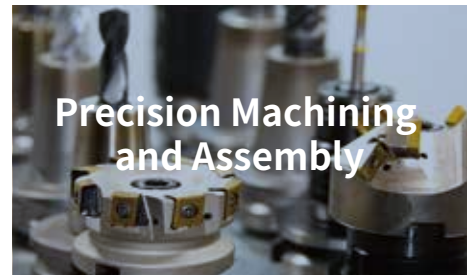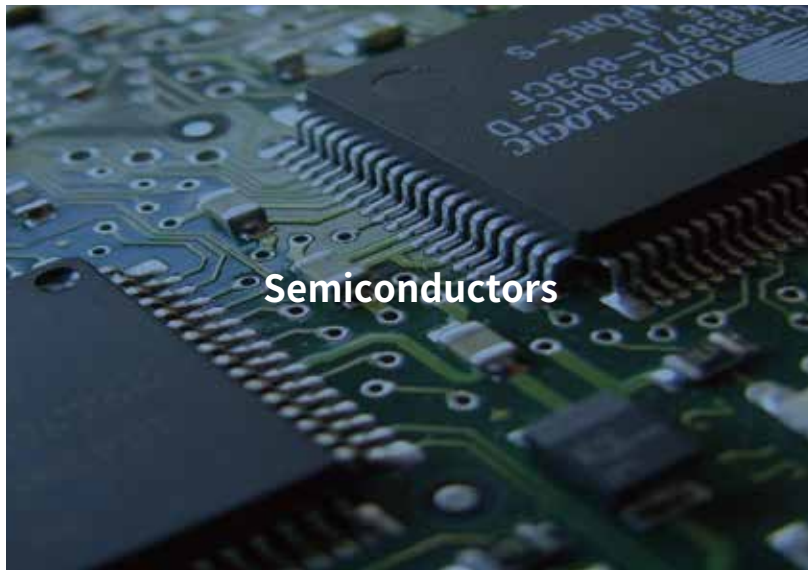

Application cases



PGE-8-14 Automatic Application

One collabotative robot with two electric grippers to complete the loading and unloading.



PGE-8-14 Electronics

Handling and positioning of very small workpieces.



RGI-35-14 Medical Automation

The automatic sub-cup processing system, through ABB's Scara robotic arm and DH-Robotics electric gripper, can automatically complete the operation of sample tube opening, scanning, information entry, pipetting, turning plate, and closing lid.



PGE-15-26 Medical Automation

Double-channel scan code to read the information, and unscrew the tube cover. Participate in automatic cup sharing process.

Application cases



PGC-50-35 Automation

Two PGC-50-35 grippers were applied with UR robot to pick& place the work-pieces on production line.



AG-160-95 Automotive

AG-160-95 electric gripper was applied with a collaborative robot to complete the clamping and assembly of needle roller bearings.



PGC-140-50 Robot New Retail

The PGC-140-50 was applied with DOOSAN robot to complete a show in CHANEL stores located in 20 countries to celebrate the 100th anniversary of CHANEL No. 5 perfume.



AG-160-95 Machining

The AG-160-95 electric gripper was applied with AGV and COBOT to complete machine tool loading and unloading and machine tool equipment management.

Short wire correspondence table

Our gripper can directly connect to the end interface of each brand of collaborative robot through a short wire.

Wire No	Support electric gripper models	UR	Dobot	Aubo	Jaka	Elite	TM	Doosan	Elephant	SINSUN	ROKAE	Han's Robot	Neuro-meka	Hanwha
W0	Small current electric gripper (Peak current $\leq 0.6A$)	CB Series												
Wa	Small current electric gripper (Peak current $< 1.5A$)	E Series	CR Series			CS Series				V				V
Wb	High current electric claw (Peak current $\leq 1.5A$)	E Series												
Wc	Small current electric gripper (Peak current $< 1.5A$)			V										
Wd	Small current electric gripper (Peak current $< 1.5A$)								V					
We	In common (Support large and small current electric gripper)							ASeries						
Wf	In common (Support large and small current electric gripper)							MSeries						
Wg	Small current electric gripper (Peak current $< 1.5A$)				V									
Wh	Small current electric gripper (Peak current $< 1.5A$)						V							
Wi	Small current electric gripper (Peak current $< 1.5A$)										V			
Wj	In common (Support large and small current electric gripper)					EC Series								
Wk	In common (Support large and small current electric gripper)											V		
Wl	In common (Support large and small current electric gripper)												V	

Quick Selection Reference

According to the following five conditions, you can quickly and initially select the matching gripper model; or you can also consult sales for detailed understanding and selection.

Condition 1

Application



- ☐ Collaborative robot
 - ☐ Load
 - ☐ Peak current
- ☐ Industrial robot
- ☐ Automation module

Condition 2

Workpiece weight



- ☐ Workpiece shape
- ☐ Workpiece material
- ☐ Friction
- ☐ ...

Condition 3

Gripping stroke



- ☐ Workpiece size
- ☐ Parallel / centric
- ☐ Outer clip, inner support
- ☐ Fingertip design
- ☐ ...

Condition 4

Feature selection



- ☐ Rotary
- ☐ Self-locking
- ☐ Envelope grab
- ☐ ...

Condition 5

Environmental requirements




- ☐ IP class
- ☐ Temperature conditions
- ☐ ...

Host Computer Debugging Software (PC Side)

User-friendly

The host computer debugging software was self-developed by DH-Robotics, it can help customers easily and quickly complete various function parameters adjustments, testing and initialization setting on the PC side. At the meaning time, various status information is provided in real time, which can save a lot of production line setup time and reduce the difficulty of operation and maintenance for on-site engineers.

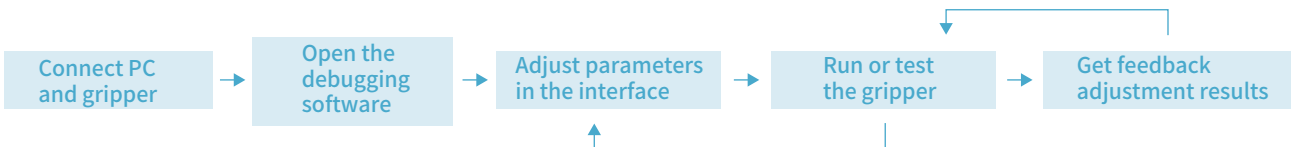

Parameters Adjustable

- gripping force
- fingertip position
- gripping speed
- rotation angle*
- rotation speed*
- rotation force(torque force)*

Real-time feedback

- four gripping states
 - ① movement status
 - ② in place
 - ③ clamp state
 - ④ dropped state
- location versus time graph
- clamping current as a function of time



Example: DH-Robotics PC software

* Please consult sales person for specific applicable models

Products Brief Parameters



PGE Series

Slim-type Electric Parallel Gripper


Precision
force control

Small Size

Fast
Response



All-in-one
Design



Adjustable
Parameters



Intelligent
Feedback



Replaceable
Fingertip



Self-locking
Mechanism



PGE-2-12



PGE-5-26



PGE-8-14



PGE-15-10



PGE-15-26



PGE-50-26



PGE-100-26

	Gripping Force (N)							Stroke (mm)	Speed (s)				IP Class
	25	50	100	150	200	250	300		0.15	0.3	0.45	0.5	
PGE-2-12	■							12	●				●
PGE-5-26	■							26		●			●
PGE-8-14	■							14		●			●
PGE-15-10	■							10		●			●
PGE-15-26	■							26				●	●
PGE-50-26		■						26			●		●
PGE-100-26			■					26				●	●

RGI Series

Electric Rotary Gripper


Infinite
Rotation

Dual Servo
System

Compact
Type



Integrated
Drive&Control



Adjustable
Parameters



Intelligent
Feedback



Replaceable
Fingertip



RGI-35-12



RGI-35-14



RGI-35-30



RGI-100-14



RGI-100-22



RGI-100-30

	Gripping Force (N)							Stroke (mm)	Speed (s)				IP Class
	25	50	100	150	200	250	300		0.55	0.6	0.65	0.7	
RGI-35-12	■							12		●			●
RGI-35-14	■							14	●				●
RGI-35-30	■							30			●		●
RGI-100-14		■						14		●			●
RGI-100-22			■					22			●		●
RGI-100-30				■				30				●	●

RGD Series Slim-type Electric Parallel Gripper


Zero Backlash

Infinite Rotation

Precise Positioning



Integrated Drive&Control



Adjustable Parameters



Intelligent Feedback



Replaceable Fingertip



Self-locking Mechanism



RGD-5-14



RGD-5-30



RGD-35-14



RGD-35-30

	Gripping Force (N)							Stroke (mm)		Speed (s)		IP Class
	25	50	100	150	200	250	300			0.5	0.7	
RGD-5-14	■							14		○ ●		●
RGD-5-30	■							30		○ ●		●
RGD-35-14	■							14		○ ●		●
RGD-35-30	■							30			○ ●	●

PGI Series Electric Parallel Gripper


High Load

High Protection Grade

Long Stroke



Integrated Drive&Control



Adjustable Parameters



Intelligent Feedback



Replaceable Fingertip



Self-locking Mechanism



PGI-140-80

	Gripping Force (N)							Stroke (mm)		Speed (s)		IP Class
	25	50	100	150	200	250	300			0.7		
PGI-140-80	■							80		○ ●		●

PGS Series Miniature Electro-magnetic Gripper

Small Size

High Frequency

Easy Operation



All-in-one Design



Replaceable Fingertip



Self-locking Mechanism



PGS-5-5

	Gripping Force (N)							Stroke (mm)		Speed (s)		IP Class
	25	50	100	150	200	250	300			0.03		
PGS-5-5	■							5		○ ●		●

PGC Series

Electric Collaborative Parallel Gripper


Plug and Play

High Protection
Grade

High Load



Integrated
Drive&Control



Adjustable
Parameters



Intelligent
Feedback



Replaceable
Fingertip



Self-locking
Mechanism



PGC-50-35



PGC-140-50



PGC-300-60

	Gripping Force (N)	Stroke (mm)	Speed (s)			IP Class	
	25 50 100 150 200 250 300		0.6	0.7	0.8	IP54	IP67
PGC-50-35		37		○ ●		●	
PGC-140-50		50	○ ●				●
PGC-300-60		60			○ ●		●

AG Series

Electric Adaptive Gripper


Plug and Play

Envelope
Adaptive Gripping

Long Stroke



Integrated
Drive&Control



Adjustable
Parameters



Intelligent
Feedback



Replaceable
Fingertip



Self-locking
Mechanism



AG-160-95



AG-105-145



DH-3

	Gripping Force (N)	Stroke (mm)	Speed (s)			IP Class	
	25 50 100 150 200 250 300		0.7			IP40	IP54
AG-160-95		95	○ ●				●
AG-105-145		145	○ ●				●
DH-3		106(parallel)/122(centric)	○ ●			●	

CG Series

Electric Centric Gripper


Centric
Gripping

High
Performance

Long Life



Integrated
Drive&Control



Adjustable
Parameters



Intelligent
Feedback



Replaceable
Fingertip



Self-locking
Mechanism



CGE-10-10



CGI-100-170



CGC-80-10

	Gripping Force (N)	Stroke (mm)	Speed (s)			IP Class	
	25 50 100 150 200 250 300		0.2	0.3	0.5	IP40	IP67
CGE-10-10		10 (Single jaw)		○ ●			
CGI-100-170		φ40~φ170 (Inward work-piece diameter)			○ ●	●	
CGC-80-10		10 (Single jaw)	○ ●				●

PGE Series

Slim-type Electric Parallel Gripper

PGE-2-12 PGE-15-26
PGE-5-26 PGE-50-26
PGE-8-14 PGE-100-26
PGE-15-10




The PGE series is an industrial slim-type electric parallel gripper. With its precise force control, compact size and highly working speed, it has become a “Hot sell product” in the field of industrial electric gripper.

Installation



1. Front installation: use front screw holes for installation
2. Rear installation: use rear screw holes for installation
3. Right installation: use right screw holes for installation
4. Left installation: use left screw holes for installation
5. Bottom installation : use bottom screw holes for installation

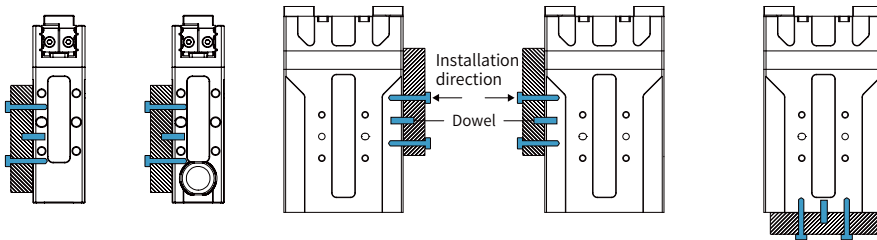

Product Features

● Small size Flexible Installation

The thinnest size is 18 mm with compact structure, supports at least five flexible installation methods to meet the needs of clamping tasks & saves design space.

● High Working Speed

The fastest opening and closing time can reach 0.15 s / 0.15 s, which can meet the high-speed and stable clamping requirements of the production line.

● Precise Force Control


With special driver design and driving algorithm compensation, the gripping force is continuously adjustable, and the force repeatability could reach 0.1 N.



Application

For scenarios requiring force control or flexibility, such as assembly, sorting and loading and unloading in semiconductor, 3C electronics, medical automation and other industries.

PGE-2-12



Static Vertical Allowable Load

Fz 35 N

Allowable Loading Moment

Mx 0.2 N·m

My 0.17 N·m

Mz 0.2 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw)	0.8~2 N
Stroke	12 mm
Recommended workpiece weight *①	0.05 kg
Opening/closing time	0.15 s/0.15 s
Repeat accuracy (position)	± 0.02 mm
Noise emission	< 40 dB
Weight	0.15 kg
Driving method	Rack and pinion + Cross roller guide
Size	Gripper Size: 65 mm x 39 mm x 18 mm Controller Size: 78 mm x 52.4 mm x 27.2 mm

Working Environment

Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
Rated voltage	24 V DC ± 10%
Rated current	0.2 A
Peak current	0.5 A
IP class	IP 40
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS



Build-in
Controller



Gripping Force
Adjustable



Position
Adjustable



Speed
Adjustable




Drop
Detection



Self-locking
Mechanism

Technical Drawings

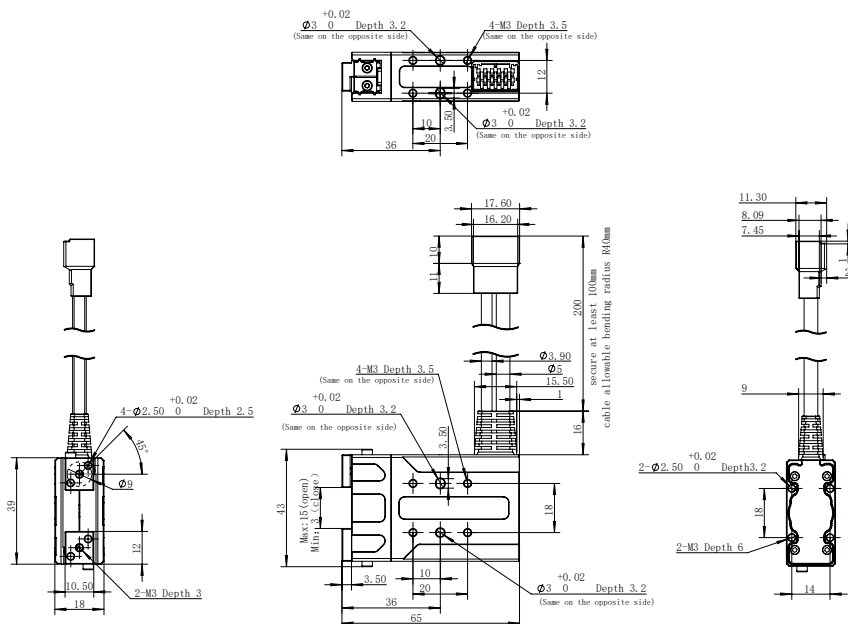

PGE-5-26



Static Vertical Allowable Load

Fz 50 N

Allowable Loading Moment

Mx 0.3 N·m

My 0.25 N·m

Mz 0.3 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw)	0.8~5 N
Stroke	26 mm
Recommended workpiece weight *①	0.1 kg
Opening/closing time	0.3 s/0.3 s
Repeat accuracy (position)	± 0.02 mm
Noise emission	< 40 dB
Weight	0.4 kg
Driving method	Rack and pinion + Cross roller guide
Size	95 mm x 55 mm x 26 mm(without brake) 113.5 mm x 55 mm x 30 mm(with brake)

Working Environment

Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
Rated voltage	24 V DC ± 10%
Rated current	0.4 A
Peak current	0.7 A
IP class	IP 40
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS



Build-in
Controller



Gripping Force
Adjustable



Position
Adjustable



Speed
Adjustable







Drop
Detection



Self-locking
Mechanism

Technical Drawings

This drawing is for the gripper without the brake. If you need the drawing for the gripper with the brake, please download it from our official website or contact our sales.

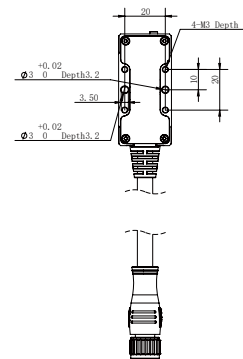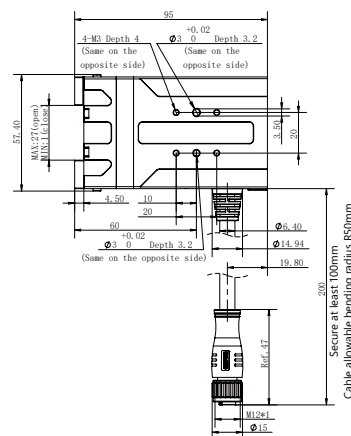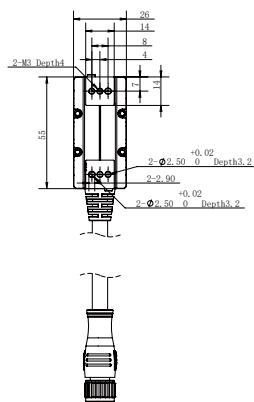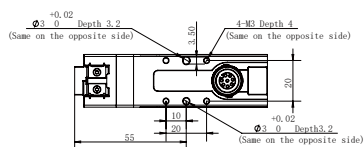

PGE-8-14



Static Vertical Allowable Load

Fz 90 N

Allowable Loading Moment

Mx 0.55 N·m

My 0.45 N·m

Mz 0.55 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw)	2~8 N
Stroke	14 mm
Recommended workpiece weight *①	0.1 kg
Opening/closing time	0.3 s/0.3 s
Repeat accuracy (position)	± 0.02 mm
Noise emission	< 40 dB
Weight	0.4 kg
Driving method	Rack and pinion + Cross roller guide
Size	97 mm x 62 mm x 31 mm

Working Environment

Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
Rated voltage	24 V DC ± 10%
Rated current	0.4 A
Peak current	0.7 A
IP class	IP 40
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS

● Build-in Controller

● Gripping Force Adjustable


● Position Adjustable

● Speed Adjustable


● Drop Detection

○ Self-locking Mechanism

Technical Drawings

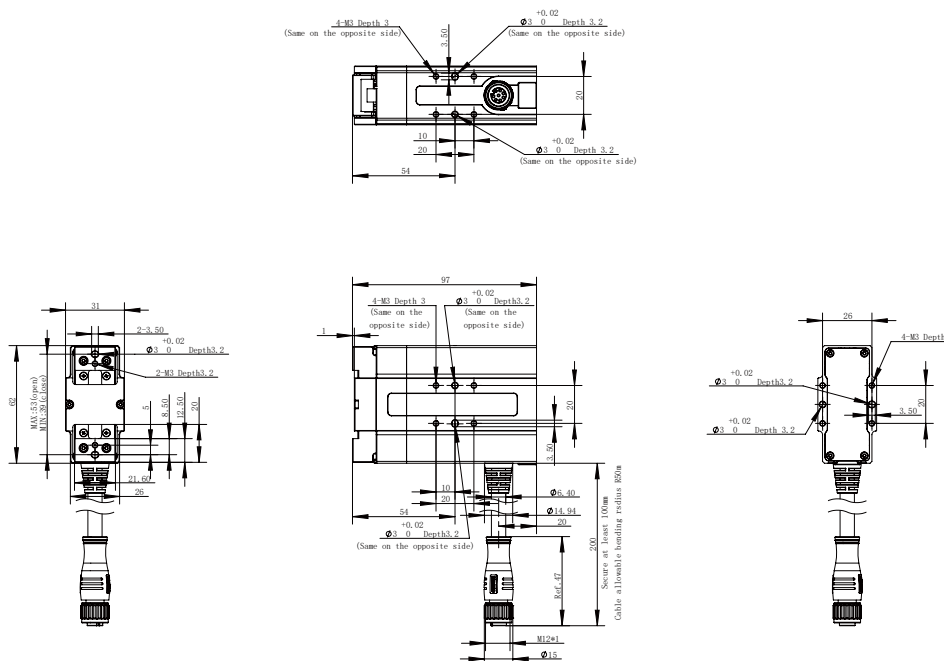

PGE-15-10

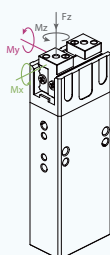

Static Vertical Allowable Load

Fz 35 N

Allowable Loading Moment

Mx 0.45 N·m

My 0.4 N·m

Mz 0.45 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw)	6~15 N
Stroke	10 mm
Recommended workpiece weight *①	0.25 kg
Opening/closing time	0.3 s/0.3 s
Repeat accuracy (position)	± 0.02 mm
Noise emission	< 60 dB
Weight	0.155 kg
Driving method	Precise planetary gears + Rack and pinion
Size	Gripper Size: 89 mm x 30 mm x 18 mm Controller Size: 78 mm x 52.4 mm x 27.2 mm

Working Environment

Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
Rated voltage	24 V DC ± 10%
Rated current	0.1 A
Peak current	0.22 A
IP class	IP 40
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS



Build-in
Controller



Gripping Force
Adjustable



Position
Adjustable



Speed
Adjustable




Drop
Detection




Self-locking
Mechanism

Technical Drawings

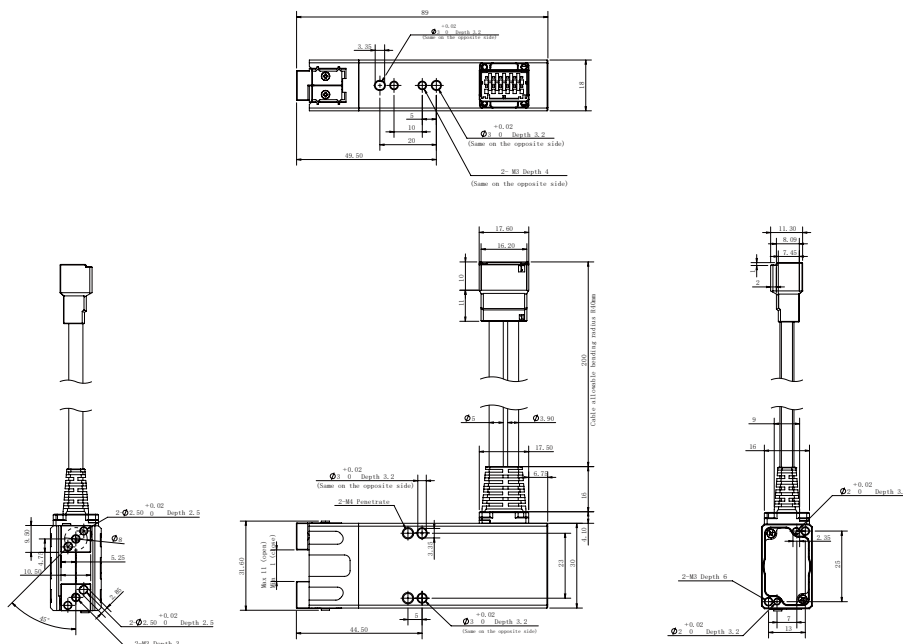

PGE-15-26

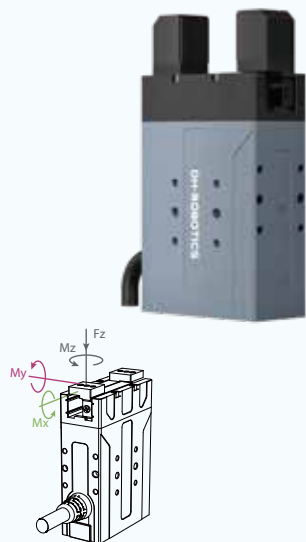

Static Vertical Allowable Load

Fz 70 N

Allowable Loading Moment

Mx 0.9 N·m

My 0.75 N·m

Mz 0.9 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw)	6~15 N
Stroke	26 mm
Recommended workpiece weight *①	0.25 kg
Opening/closing time	0.5 s/0.5 s
Repeat accuracy (position)	± 0.02 mm
Noise emission	< 40 dB
Weight	0.33 kg
Driving method	Precise planetary gears + Rack and pinion
Size	86.5 mm x 55 mm x 26 mm(without brake) 107.5 mm x 55 mm x 26 mm(with brake)





Working Environment

Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
Rated voltage	24 V DC ± 10%
Rated current	0.25 A
Peak current	0.5 A
IP class	IP 40
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS

●	●	●	●	●	●○
Build-in Controller	Gripping Force Adjustable	Position Adjustable	Speed Adjustable	Drop Detection	Self-locking Mechanism

Technical Drawings

This drawing is for the gripper without the brake. If you need the drawing for the gripper with the brake, please download it from our official website or contact our sales.

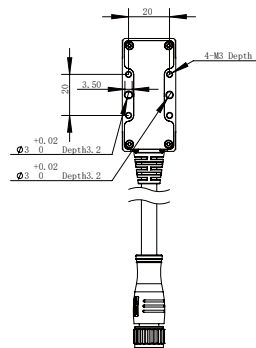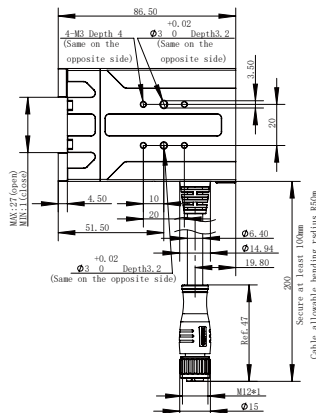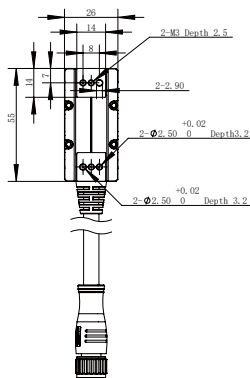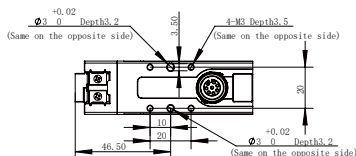

PGE-50-26



Static Vertical Allowable Load

Fz 150 N

Allowable Loading Moment

Mx 2.5 N·m

My 2 N·m

Mz 3 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw)	15~50 N
Stroke	26 mm
Recommended workpiece weight *①	1 kg
Opening/closing time	0.45 s/0.45 s
Repeat accuracy (position)	± 0.02 mm
Noise emission	< 40 dB
Weight	0.4 kg
Driving method	Precise planetary gears + Rack and pinion
Size	97 mm x 55 mm x 29 mm(without brake) 118 mm x 55 mm x 29 mm(with brake)


Working Environment

Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
Rated voltage	24 V DC ± 10%
Rated current	0.25 A
Peak current	0.5 A
IP class	IP 40
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS

●	●	●	●	●	●○
Build-in Controller	Gripping Force Adjustable	Position Adjustable	Speed Adjustable	Drop Detection	Self-locking Mechanism

Technical Drawings

This drawing is for the gripper without the brake. If you need the drawing for the gripper with the brake, please download it from our official website or contact our sales.

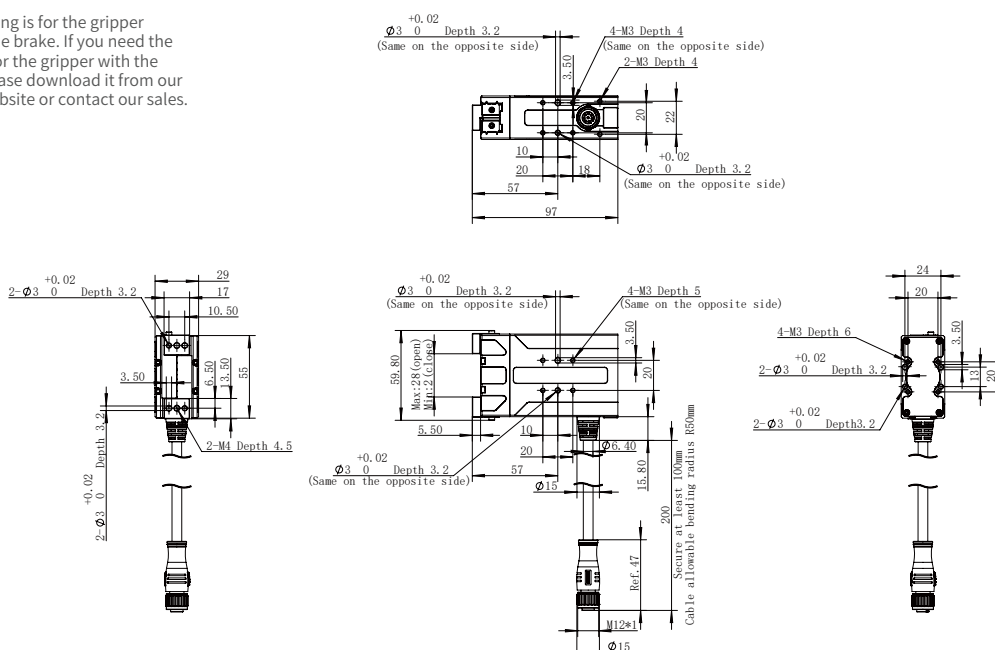

RGI Series Electric Rotary Gripper

RGI-35-12 RGI-100-14


RGI-35-14 RGI-100-22

RGI-35-30 RGI-100-30




RGI series is the first fully self-developed infinite rotating gripper with a compact and precise structure on the market. It is widely applied in medical automation industry to grip and rotate the test tubes as well as other industries like electronics and New energy industry.

Installation



1. Side installation: use side screw holes for installation
2. Bottom installation : use bottom screw holes for installation
3. Rear installation: use rear screw holes for installation
4. Front installation: Install with front screw holes

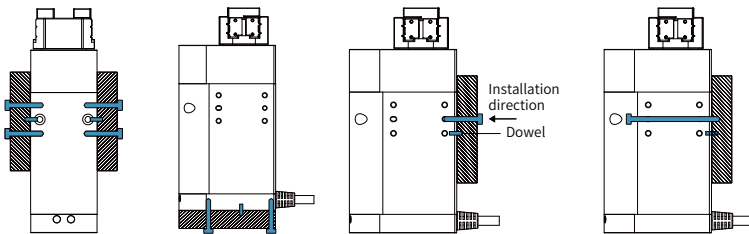

Product Feature

● Gripping & Infinite Rotation

The unique structural design in the industry can realize the simultaneous gripping and infinite rotation on one electric gripper, and solve the winding problem in non-standard design and rotation.

● Compact Double Servo System

Dual servo systems are creatively integrated in a thin machine body, which is compact in design and can be adapted to many industrial scenes.

● High Gripping Force and Torque

The maximum single-sided gripping force is 100N, and the maximum torque is $1.5\text{N} \cdot \text{m}$. Though precise force control and position control, the RGI gripper can more stably complete the grasping and rotating tasks.



Application

Medical automation reagents, blood samples, nucleic acids and other sample processing scenarios such as opening and closing covers, scanning code detection, etc.;

RGI-100 series comes standard with fingertips and can be adapted to 10 mix 1 and 20 mix 1 size tubes to meet the needs of large-scale nucleic acid sampling.

RGI-35-12



Static Vertical Allowable Load

Fz	100 N
----	-------

Allowable Loading Moment

M_x	$1.5 \text{ N} \cdot \text{m}$
-------	--------------------------------

My 1.1 N · m

Mz 2.1 N · m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion. If you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter	Specification	Test Method	Result
Material	304 Stainless Steel	Visual Inspection	Compliant
Dimensions	100mm x 50mm x 2mm	Caliper Measurement	100mm x 50mm x 2mm
Weight	~150g	Scale Measurement	~150g
Surface Finish	Polished	Visual Inspection	Polished
Corrosion Resistance	ASTM A276	Salt Spray Test	Pass
Strength	Yield: 205MPa, Tensile: 505MPa	Tensile Test	Yield: 205MPa, Tensile: 505MPa
Hardness	HRC 20-22	Rockwell C Test	HRC 20-22
Welding	Welded	Visual Inspection	Welded
Coating	None	Visual Inspection	None
Marking	None	Visual Inspection	None
Packaging	100 pieces per bag	Counting	100 pieces per bag

Gripping force (per jaw)	13~35 N
--------------------------	---------

Stroke	12 mm
--------	-------

Rated torque	0.2 N · m
--------------	-----------

Peak torque	0.5 N · m
-------------	-----------

Rotary range	Infinite Rotating
--------------	-------------------

Recommended workpiece weight * ^①	0.5 kg
---	--------

Max. rotation speed	2160 °/s
---------------------	----------

Repeat accuracy (swiveling)	$\pm 0.05^\circ$
-----------------------------	------------------

Repeat accuracy (position)	± 0.02 mm
----------------------------	---------------

Opening/closing time	0.6 s/0.6 s
----------------------	-------------

Weight	0.64 kg
--------	---------

Size	150 mm x 53 mm x 34 mm Rotaty Diameter:33mm
------	--

Working Environment

Communication interface Standard: Modbus RTU (RS485), Digital I/O
Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT* ②

Rated voltage	24 V DC \pm 10%
---------------	-------------------








Rated current	1.7 A
---------------	-------

Peak current	2.5 A
--------------	-------


IP class	IP 40
----------	-------

Recommended environment	0~40°C, under 85% RH
-------------------------	----------------------


Certification	CE, FCC, RoHS
---------------	---------------

						
Build-in Controller	Gripping Force Adjustable	Position Adjustable	Speed Adjustable	Drop Detection	Rotary Adjustable	Self-locking Mechanism

Technical Drawings

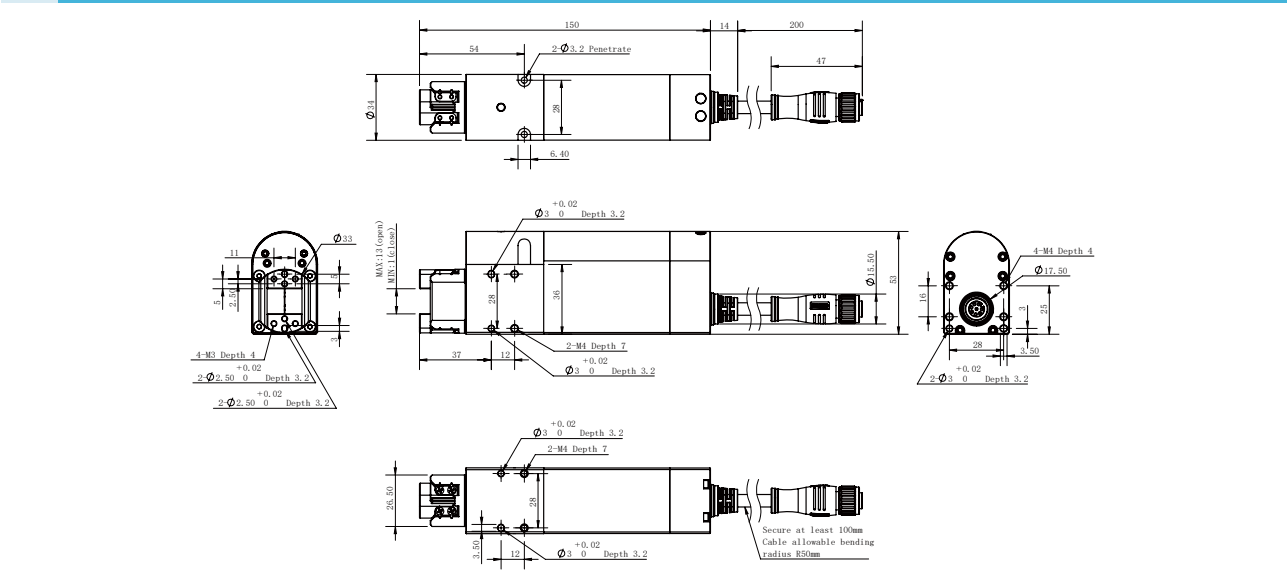

RGI-35-14

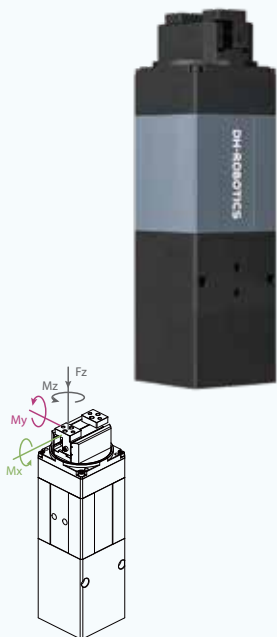

Static Vertical Allowable Load

Fz 150 N

Allowable Loading Moment

Mx 2 N·m

My 1.5 N·m

Mz 2.5 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw)	10~35 N
Stroke	14 mm
Rated torque	0.25 N·m
Peak torque	0.4 N·m
Rotary range	Infinite Rotating
Recommended workpiece weight *①	0.7 kg
Max. rotation speed	1500 °/s
Repeat accuracy (swiveling)	± 0.05 °
Repeat accuracy (position)	± 0.02 mm
Opening/closing time	0.55 s/0.55 s
Weight	1.0 kg
Size	178 mm x 50 mm x 50 mm Rotary Diameter: 48.7 mm

Working Environment

Communication interface Standard: Modbus RTU (RS485), Digital I/O
Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②

Rated voltage 24 V DC ± 10%

Rated current 1.1 A

Peak current 2.0 A


IP class IP 40

Recommended environment 0~40°C, under 85% RH


Certification CE, FCC, RoHS

● Build-in Controller	● Gripping Force Adjustable	● Position Adjustable	● Speed Adjustable	● Drop Detection	● Rotary Adjustable	○ Self-locking Mechanism
-----------------------	-----------------------------	-----------------------	--------------------	------------------	---------------------	--------------------------

Technical Drawings

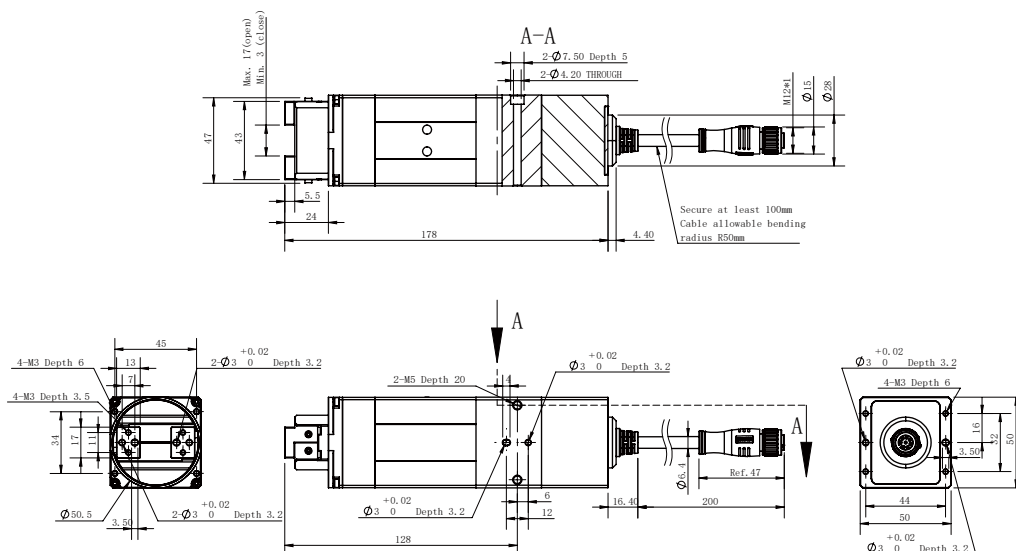

CG Series



RGI-100-14



Static Vertical Allowable Load

Fz 150 N

Allowable Loading Moment

Mx 2.5 N·m

My 3 N·m

Mz 4 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw) 30~100 N

Stroke 14 mm

Rated torque 0.5 N·m

Peak torque 1.5 N·m

Rotary range Infinite Rotating

Recommended workpiece weight *① 1.5 kg

Max. rotation speed 2160 °/s

Repeat accuracy (swiveling) ± 0.05 °

Repeat accuracy (position) ± 0.02 mm

Opening/closing time 0.6 s/0.6 s

Weight 1.28 kg

Size 158 mm x 75.5 mm x 47 mm
Rotary Diameter: 47.1mm

Working Environment

Communication interface Standard: Modbus RTU (RS485), Digital I/O
Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②

Rated voltage 24 V DC ± 10%

Rated current 1.0 A

Peak current 4.0 A


IP class IP 40


Recommended environment 0~40°C, under 85% RH

Certification CE, FCC, RoHS


●	●	●	●	●	●	○
Build-in Controller	Gripping Force Adjustable	Position Adjustable	Speed Adjustable	Drop Detection	Rotary Adjustable	Self-locking Mechanism

Technical Drawings

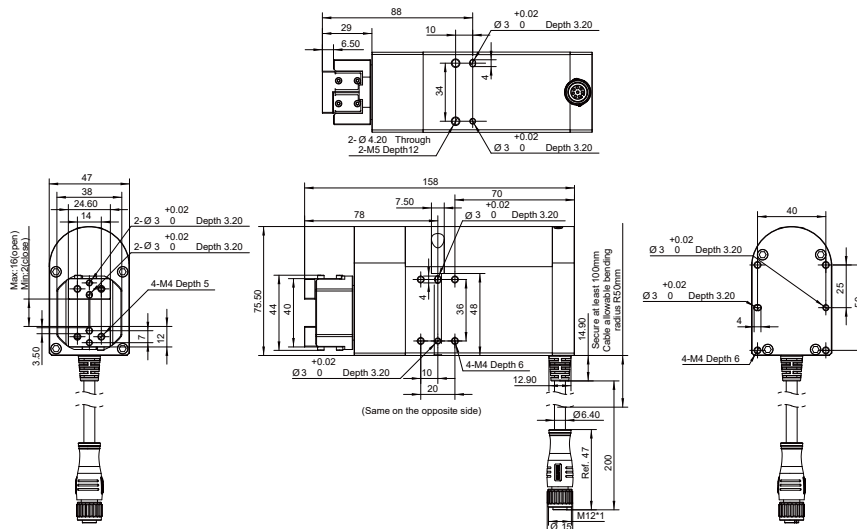

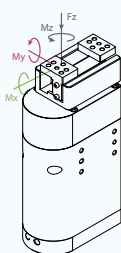

CG Series

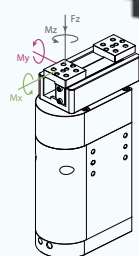


RGD Series

Direct Drive Rotary Gripper

RGD-5-14 RGD-35-14
RGD-5-30 RGD-35-30




The RGD direct-drive electric rotary gripper of DH-Robotics adopts a direct-drive backlash-free rotation module to improve the rotary accuracy, and thus is perfectly suited for high-precision manufacturing applications.



Installation

1. Front installation: use front screw holes for installation
2. Bottom installation: use bottom screw holes for installation

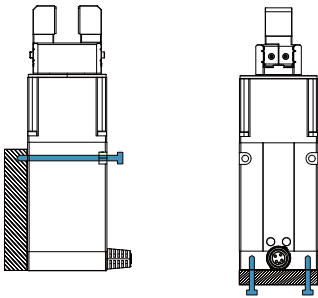

Product Features

● Zero Rotary Backlash High Repeatability

The RGD series adopts direct-drive rotary motors to realize zero rotary backlash and a rotary resolution of up to 0.01° , which applies to rotary positioning scenarios in semiconductor production.

● High Dynamic Response High-speed Stability

The precision direct-drive technology, coupled with DH-Robotics' excellent drive control, realizes perfect control of gripping and rotation. The rotation speed is up to 1500° per second.

● All-in-one Design Power-off Protection


The gripper adopts the design of integrating the dual servo system of gripping and rotation with the drive control module, which is smaller and more compact, and applies to more scenarios. Brakes are optional to meet the requirements of various applications.



Application

With the direct-drive technology, the RGD gripper can provide greatly improved rotary accuracy, which can be used in scenarios such as the high-precision positioning assembly, transport, and deflection correction of 3C electronics and semiconductors.

RGD-5-14

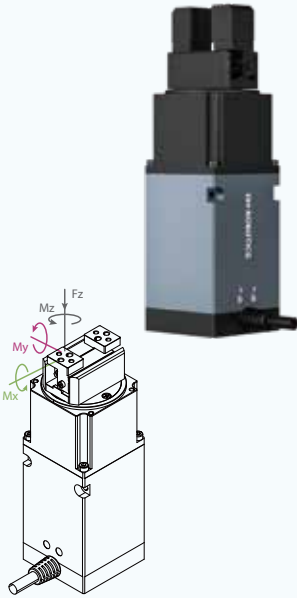

Static Vertical Allowable Load

Fz 150 N

Allowable Loading Moment

Mx 2 N·m

My 1.5 N·m

Mz 2.5 N·m

*① The peak torque can be increased up to 0.5N·m. Please consult the technical support staff for details.

*② It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

Parameters

Product Parameter

Gripping force (per jaw)	2-5.5 N
Stroke	14 mm
Rated torque	0.1 N·m
Peak torque *①	0.25 N·m
Rotary range	Infinite Rotating
Recommended workpiece weight *②	0.05 kg
Max. rotation speed	1500 °/s
Rotary backlash	Zero backlash
Repeat accuracy (swiveling)	± 0.1 °
Repeat accuracy (position)	± 0.02 mm
Opening/closing time	0.5 s/0.5 s
Weight	0.86 kg(without brake) 0.88 kg(with brake)
Size	149 mm x 50 mm x 50 mm Rotary Diameter:48.7mm


Working Environment

Communication interface	Modbus RTU (RS485)
Rated voltage	24 V DC ± 10%
Rated current	1.2 A
Peak current	2.5 A
IP class	IP 40
Recommended environment	0~40°C, under 85% RH

Certification CE, FCC, RoHS


●	●	●	●	●	●	●○
Build-in Controller	Gripping Force Adjustable	Position Adjustable	Speed Adjustable	Drop Detection	Rotary Adjustable	Self-locking Mechanism

Technical Drawings

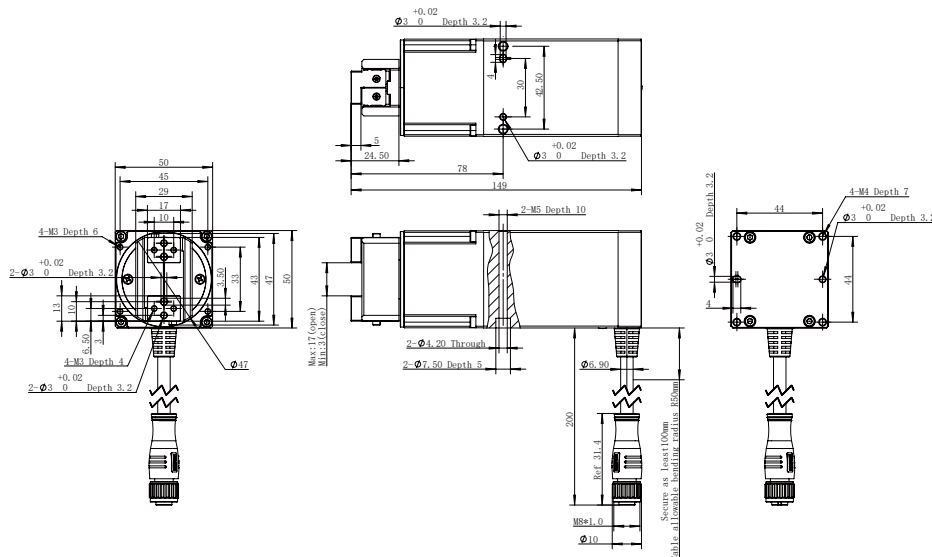

RGD-5-30

The image displays the RGD-5-30 robot gripper, a compact industrial device. It features a black upper section with two gripper fingers and a grey lower section. A technical diagram to the left illustrates the gripper's base with coordinate axes: F_z (vertical force), M_z (rotational moment), M_y (rotational moment), and M_x (rotational moment).

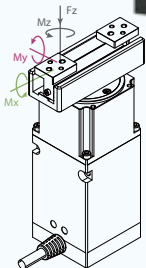

Static Vertical Allowable Load

Fz	150 N
----	-------

Allowable Loading Moment

M_x	$2 \text{ N} \cdot \text{m}$
-------	------------------------------

My 1.5 N · m

Mz 2.5 N · m

*① The peak torque can be increased up to $0.5\text{N}\cdot\text{m}$. Please consult the technical support staff for details.

② It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

Parameters

Product Parameter	Specification	Test Method	Result
Material	304 Stainless Steel	Visual Inspection	Compliant
Dimensions	100mm x 50mm x 2mm	Caliper Measurement	100mm x 50mm x 2mm
Weight	150g	Scale Measurement	150g
Surface Finish	Polished	Visual Inspection	Polished
Corrosion Resistance	ISO 9001	Salt Spray Test	Pass
Strength	200N	Tensile Test	200N
Temperature Resistance	-20°C to 100°C	Thermal Shock Test	Pass
Electrical Resistance	100Ω	Electrical Resistance Test	100Ω
Environmental Resistance	ISO 9001	Humidity Test	Pass
Compliance	ISO 9001	CE Marking	Compliant

Gripping force (per jaw)	2-5.5 N
--------------------------	---------

Stroke	30 mm
--------	-------

Rated torque	0.1 N · m
--------------	-----------

Peak torque ^{★①}	0.25 N · m
---------------------------	------------

Rotary range	Infinite Rotating
--------------	-------------------

Recommended workpiece weight ^{★②}	0.05 kg
--	---------

Max. rotation speed	1500 °/s
---------------------	----------

Rotary backlash	Zero backlash
-----------------	---------------

Repeat accuracy (swiveling)	$\pm 0.1^\circ$
-----------------------------	-----------------

Repeat accuracy (position)	± 0.02 mm
----------------------------	---------------

Opening/closing time	0.5 s/0.5 s
----------------------	-------------

Weight	1 kg _(without brake)	1.02 kg _(with brake)
--------	---------------------------------	---------------------------------

Size	149 mm x 50 mm x 50 mm Rotaty Diameter:83.6mm
------	--

Working Environment

Communication interface	Modbus RTU (RS485)
-------------------------	--------------------

Rated voltage	24 V DC \pm 10%
---------------	-------------------

Rated current	1.2 A
---------------	-------

Peak current	2.5 A
--------------	-------


IP class	IP 40
----------	-------

Recommended environment	0~40°C, under 85% RH
-------------------------	----------------------


Certification	CE, FCC, RoHS
---------------	---------------

						
Build-in Controller	Gripping Force Adjustable	Position Adjustable	Speed Adjustable	Drop Detection	Rotary Adjustable	Self-locking Mechanism

Technical Drawings

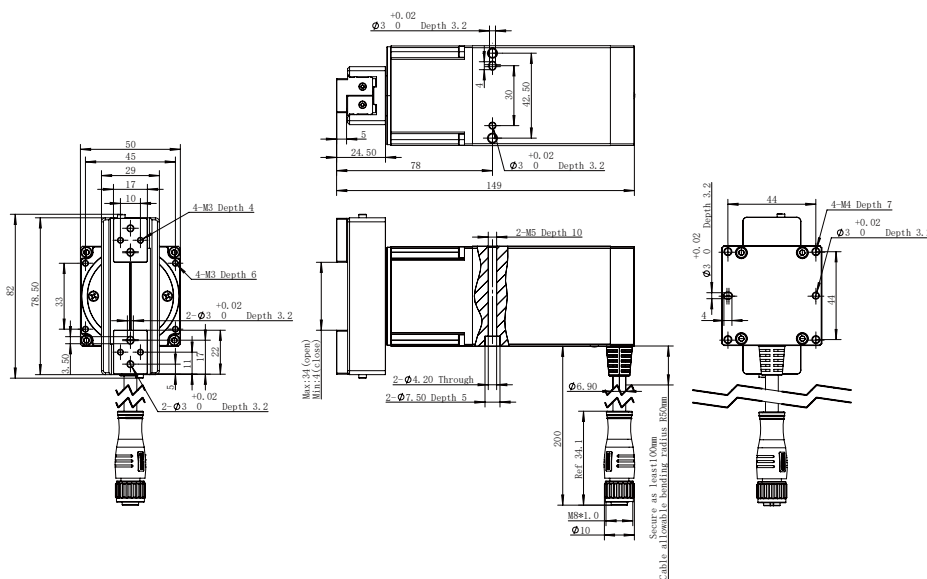

RGD-35-14

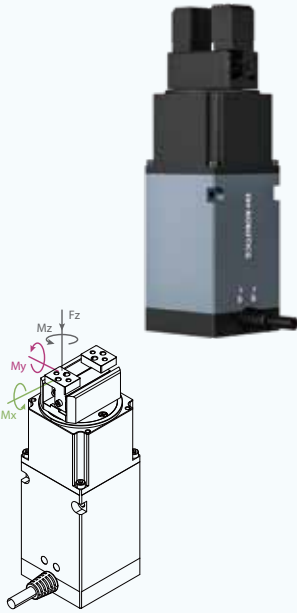

Static Vertical Allowable Load

Fz 150 N

Allowable Loading Moment

Mx 2 N·m

My 1.5 N·m

Mz 2.5 N·m

*① The peak torque can be increased up to 0.5N·m. Please consult the technical support staff for details.

*② It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

Parameters

Product Parameter

Gripping force (per jaw)	10-35 N
Stroke	14 mm
Rated torque	0.1 N·m
Peak torque *①	0.25 N·m
Rotary range	Infinite Rotating
Recommended workpiece weight *②	0.35 kg
Max. rotation speed	1500 °/s
Rotary backlash	Zero backlash
Repeat accuracy (swiveling)	± 0.1 °
Repeat accuracy (position)	± 0.02 mm
Opening/closing time	0.5 s/0.5 s
Weight	0.86 kg(without brake) 0.88 kg(with brake)
Size	149 mm x 50 mm x 50 mm Rotary Diameter: 48.7mm

Working Environment

Communication interface	Modbus RTU (RS485)
Rated voltage	24 V DC ± 10%
Rated current	1.2 A
Peak current	2.5 A
IP class	IP 40
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS



Build-in
Controller



Gripping Force
Adjustable



Position
Adjustable



Speed
Adjustable



Drop
Detection




Rotary
Adjustable



Self-locking
Mechanism

Technical Drawings

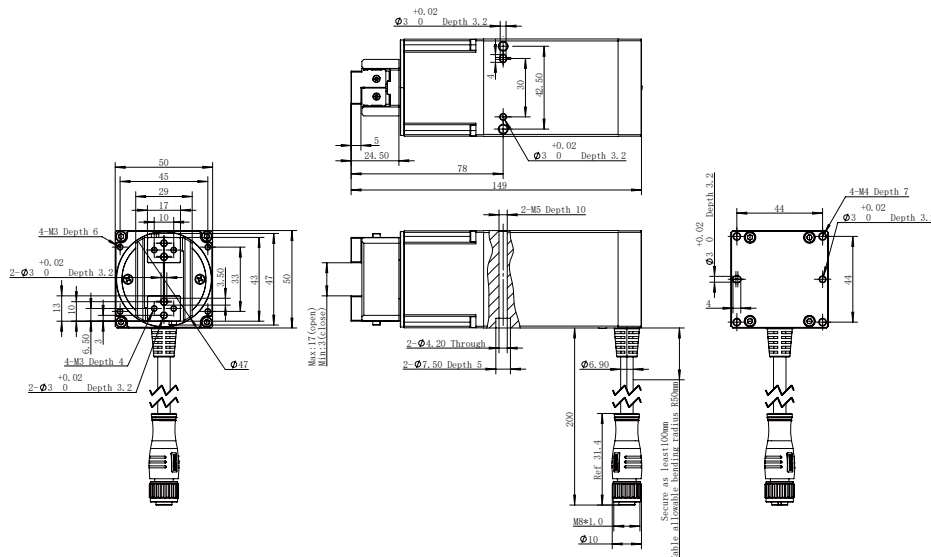

RGD-35-30



Static Vertical Allowable Load

Fz 150 N

Allowable Loading Moment

Mx 2 N·m

My 1.5 N·m

Mz 2.5 N·m

*① The peak torque can be increased up to 0.5N·m. Please consult the technical support staff for details.

*② It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

Parameters

Product Parameter


Gripping force (per jaw)	10-35 N
Stroke	30 mm
Rated torque	0.1 N·m
Peak torque *①	0.25 N·m
Rotary range	Infinite Rotating
Recommended workpiece weight *②	0.35 kg
Max. rotation speed	1500 °/s
Rotary backlash	Zero backlash
Repeat accuracy (swiveling)	± 0.1 °
Repeat accuracy (position)	± 0.02 mm
Opening/closing time	0.7 s/0.7 s
Weight	1 kg(without brake) 1.02 kg(with brake)
Size	149 mm x 50 mm x 50 mm Rotary Diameter:83.6mm

Working Environment

Communication interface	Modbus RTU (RS485)
Rated voltage	24 V DC ± 10%
Rated current	1.2 A
Peak current	2.5 A
IP class	IP 40
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS

●	●	●	●	●	●	●○
Build-in Controller	Gripping Force Adjustable	Position Adjustable	Speed Adjustable	Drop Detection	Rotary Adjustable	Self-locking Mechanism

Technical Drawings

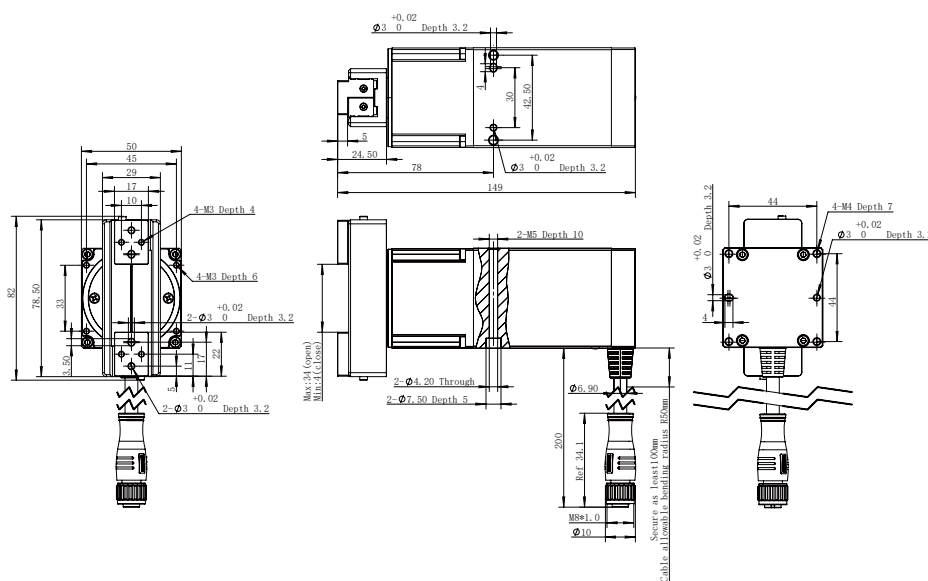

PGI Series Electric Parallel Gripper

PGI-140-80




Based on the industrial requirements of “long stroke, high load, and high protection level”, DH-Robotics independently developed the PGI series of industrial electric parallel gripper. The PGI series is widely used in various industrial scenarios with positive feedback.

Installation



1. Front and rear installation: use front and rear screw holes for installation
2. Bottom installation : use bottom screw holes for installation

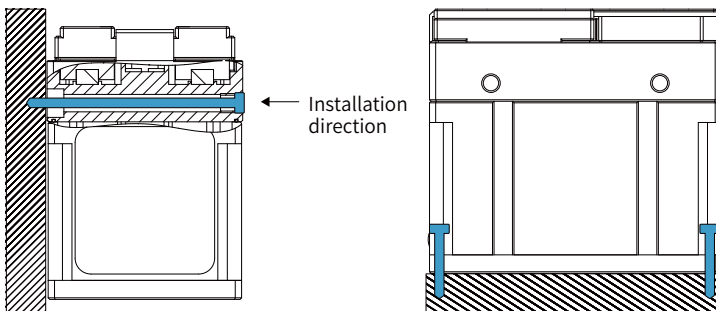

Product Features

● Long Stroke


Long stroke reach to 80 mm. With the customization fingertips, it can stably grasp the medium and large objects below 3kg and suitable for lots of industrial scenes.

● High Protection Level

The protection level of PGI-140-80 reaches to IP54, which is able to work under harsh environment with dust and liquid splash.

● High Load


The maximum single-sided gripping force of PGI-140-80 is 140 N, and the maximum recommended load is 3 kg, which can meet more diverse gripping needs.

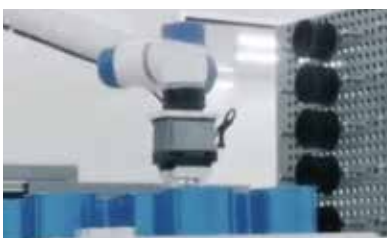

Application

In industrial scenarios, it is used for gripping, handling and assembly of heavy workpieces. Mostly used in new energy, auto parts, machining, 3C electronics and other industries.

PGI-140-80

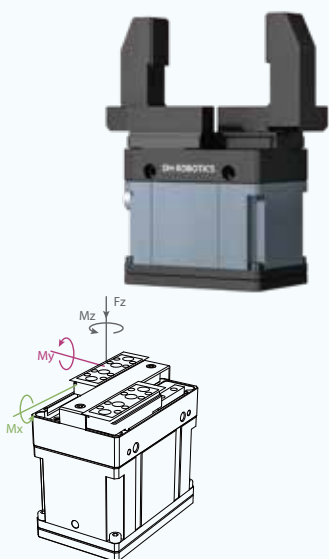

Static Vertical Allowable Load

Fz 300 N

Allowable Loading Moment

Mx 7 N·m

My 7 N·m

Mz 7 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter


Gripping force (per jaw)	40~140 N
Stroke	80 mm
Recommended workpiece weight *①	3 kg
Opening/closing time	0.7 s/0.7 s
Repeat accuracy (position)	± 0.03 mm
Noise emission	< 50 dB
Weight	1 kg (exclude fingers)
Driving method	Precise planetary gears + Rack and pinion
Size	95 mm x 67.1 mm x 92.5 mm

Working Environment

Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
Rated voltage	24 V DC ± 10%
Rated current	0.5 A
Peak current	1.2 A
IP class	IP 54
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS

● Build-in Controller	● Gripping Force Adjustable	● Position Adjustable	● Speed Adjustable	● Drop Detection	● Self-locking Mechanism
-----------------------	-----------------------------	-----------------------	--------------------	------------------	--------------------------

Technical Drawings

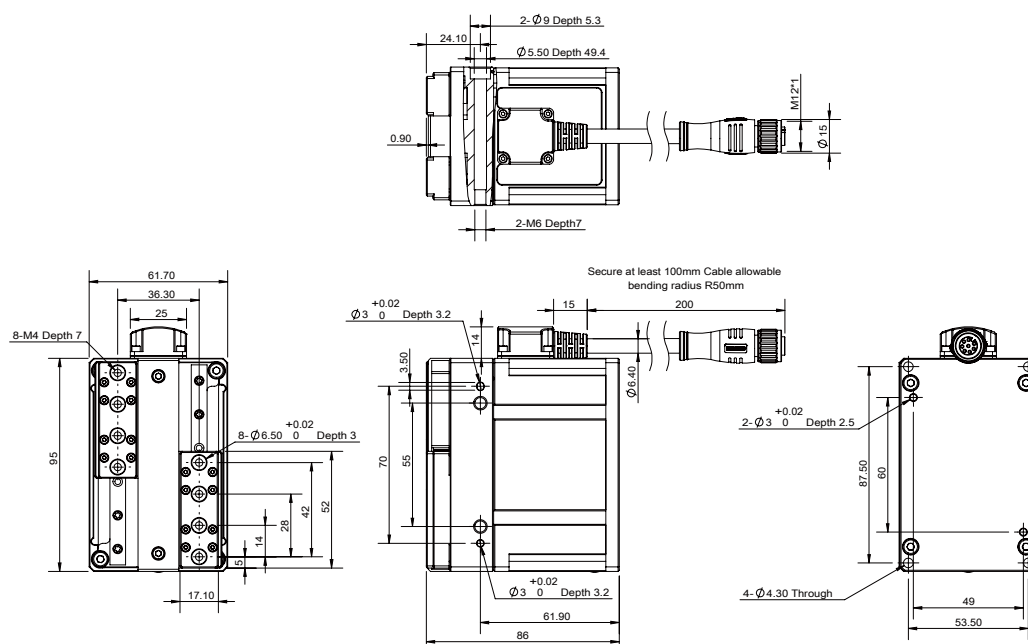

PGS Series Miniature Electro-magnetic Gripper

PGS-5-5




The PGS series is a miniature electromagnetic gripper with high working frequency. Based on a split design, the PGS series could be applied in space-limited environment with the ultimate compact size and simple configuration.

Installation



1. Front and rear installation: use front and rear screw holes for installation
2. Bottom installation : use bottom screw holes for installation

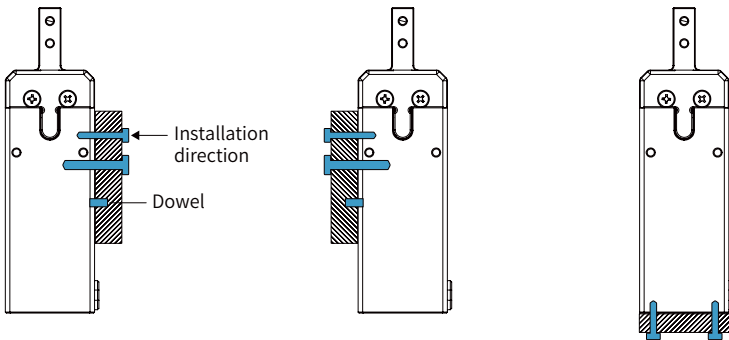

Product Features

● Small Size


Compact size with 20×26 mm, it can be deployed in a relatively small environment.

● High Frequency

The opening/closing time could reach 0.03s to meet the needs of fast grasping.

● Easy to Use


The configuration is simple with the Digital I/O communication protocol.

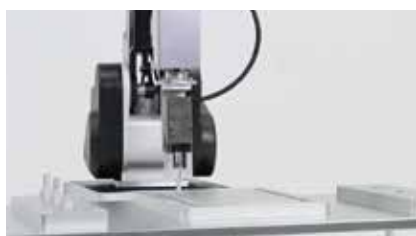

Application

High-frequency fast capture, detection, adjustment and other scenarios in 3C electronics, medical automation, semiconductor and other industries.

PGS-5-5

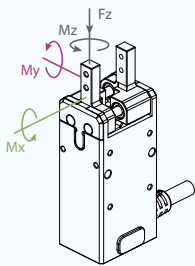

Static Vertical Allowable Load

Fz 150 N

Allowable Loading Moment

Mx 0.62 N·m

My 0.62 N·m

Mz 0.62 N·m

*It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

Parameters

Product Parameter


Gripping force (per jaw)	3.5-5 N
Stroke	5 mm
Recommended workpiece weight *	0.05 kg
Opening/closing time	0.03 s/0.03 s
Repeat accuracy (position)	± 0.01 mm
Noise emission	< 50 dB
Weight	0.2 kg
Driving method	Electromagnet + Spring
Size	Gripper Size: 68.5 mm x 26 mm x 20 mm Controller Size: 67.7 mm x 66.8 mm x 29.6 mm

Working Environment

Communication interface	Digital I/O
Rated voltage	24 V DC ± 10%
Rated current	0.1 A
Peak current	3.0 A
IP class	IP 40
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS

<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Build-in Controller	Gripping Force Adjustable	Position Adjustable	Speed Adjustable	Drop Detection	Self-locking Mechanism

Technical Drawings

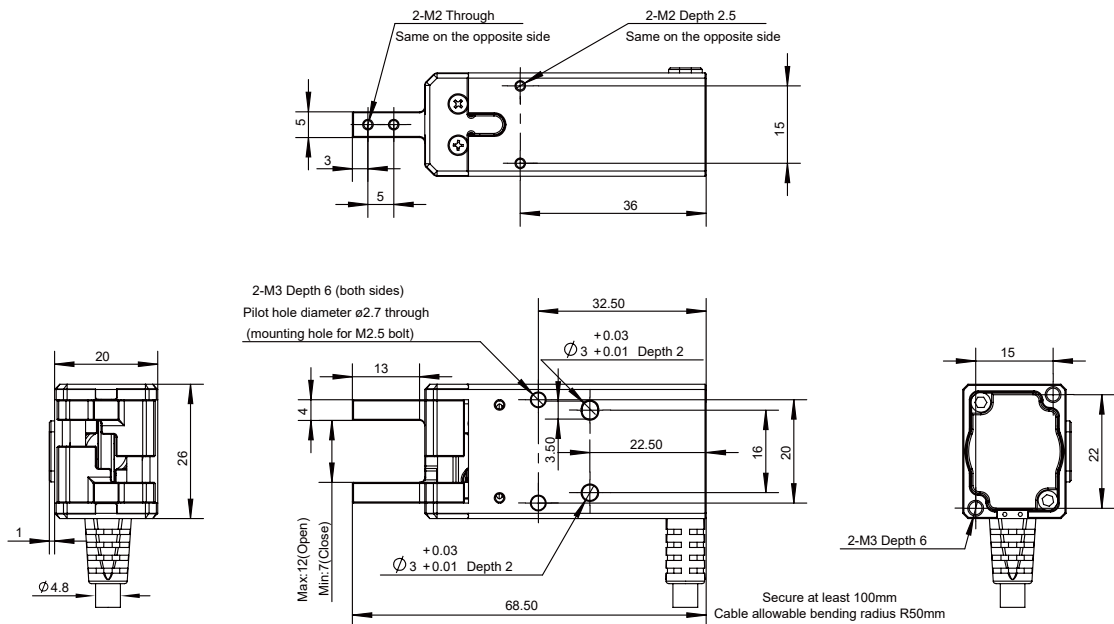

PGC Series

Electric Collaborative Parallel Gripper




PGC-50-35

PGC-140-50

PGC-300-60




DH-Robotics PGC series of collaborative parallel electric grippers is an electric gripper mainly used in cooperative manipulators. It has the advantages of high protection level, plug and play, large load and so on. The PGC series combines precision force control and industrial aesthetics. In 2021, it won two industrial design awards, the Red Dot Award and the IF Award.



Installation

1. Bottom installation : use bottom screw holes for installation

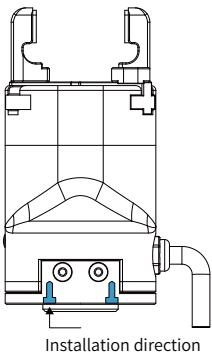

Product Features

● High protection level

The protection level of PGC series is up to IP67, so the PGC series is able to work under harsh conditions such as machine tending environment.

● Plug & Play

PGC series supports plug & play with most collaborative robot brands on the market which is easier to control and program.

● High Load

The gripping force of the PGC series could reach 300 N, and the maximum load can reach 6 kg, which can meet more diverse gripping needs.



Application

With collaborative robots, it can complete a series of complex processes including gripping, handling, and assembly in scenarios such as medical automation, 3C electronics, new energy, and new robot retail.

PGC-50-35



Static Vertical Allowable Load

Fz 150 N

Allowable Loading Moment

Mx 2.5 N · m

My 2 N · m

Mz 3 N · m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, If you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter



Gripping force (per jaw)	15~50 N
Stroke	37 mm
Recommended workpiece weight * ^①	1 kg
Opening/closing time	0.7 s/0.7 s
Repeat accuracy (position)	± 0.03 mm
Noise emission	< 50 dB
Weight	0.5 kg
Driving method	Precise planetary gears + Rack and pinion
Size	124 mm x 63 mm x 63 mm

Working Environment



Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT * ^②
Rated voltage	24 V DC ± 10%
Rated current	0.25 A
Peak current	0.5 A
IP class	IP 54
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS

<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Build-in Controller	Gripping Force Adjustable	Position Adjustable	Speed Adjustable	Drop Detection	Plug & Play	Self-locking Mechanism


Technical Drawings

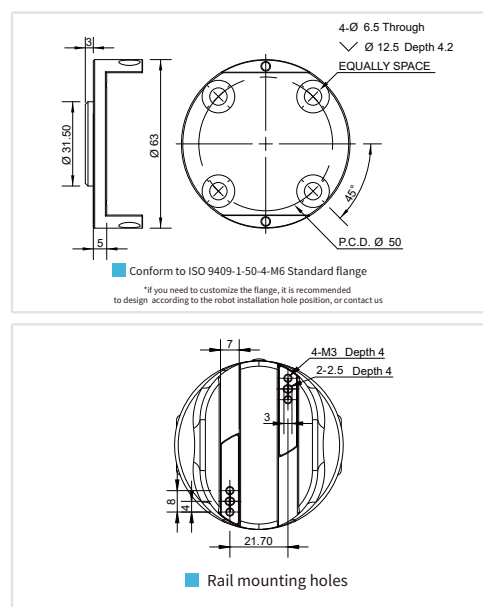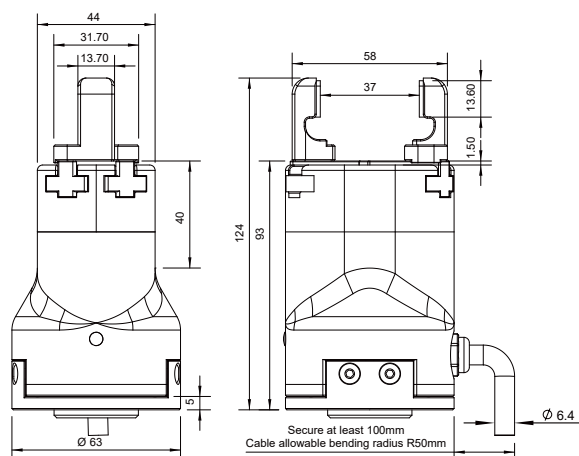

PGC-140-50



The image shows the PGC-140-50 force-measuring gripper. The top photograph is a physical view of the device, which has a black upper section with a gripper and a grey lower section with control buttons. The bottom schematic diagram illustrates the force and torque measurement capabilities, with F_z representing vertical force, M_z representing torque around the vertical axis, M_y representing torque around the horizontal axis, and M_x representing torque around the horizontal axis.



Static Vertical Allowable Load

F_z	300 N
-------	-------

Allowable Loading Moment

M_x	$7 \text{ N} \cdot \text{m}$
-------	------------------------------

My 7 N · m

Mz 7 N · m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion. If you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter	Specification	Test Method	Result
Material	304 Stainless Steel	Visual Inspection	Compliant
Dimensions	100mm x 50mm x 2mm	Caliper Measurement	100mm x 50mm x 2mm
Weight	~150g	Scale Measurement	152g
Surface Finish	Polished	Visual Inspection	Polished
Corrosion Resistance	ASTM A276	Salt Spray Test	Pass
Strength	Yield: 205MPa, Tensile: 505MPa	Tensile Test	Yield: 208MPa, Tensile: 508MPa
Hardness	HRC 20-22	Rockwell C Test	HRC 21
Welding	Welded	Visual Inspection	Welded
Coating	None	Visual Inspection	None
Marking	None	Visual Inspection	None
Packaging	100 pieces per bag	Counting	100 pieces

Gripping force (per jaw)	40~140 N
--------------------------	----------

Stroke	50 mm
--------	-------

Recommended workpiece weight ^{★①}	3 kg
--	------

Opening/closing time	0.6 s/0.6 s
----------------------	-------------

Repeat accuracy (position)	± 0.03 mm
----------------------------	---------------

Noise emission	< 50 dB
----------------	---------

Weight	1 kg
--------	------

Driving method	Precise planetary gears + Rack and pinion
----------------	---

Size	138.5 mm x 75 mm x 75 mm
------	--------------------------

Working Environment

Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
-------------------------	---

Rated voltage	24 V DC \pm 10%
---------------	-------------------


Rated current	0.4 A
---------------	-------

Peak current	1.0 A
--------------	-------



IP class	IP 67
----------	-------

Recommended environment	0~40°C, under 85% RH
-------------------------	----------------------

Certification	CE, FCC, RoHS
---------------	---------------

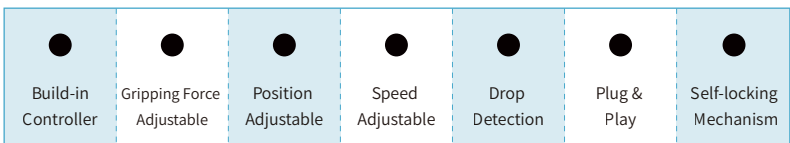

Technical Drawings

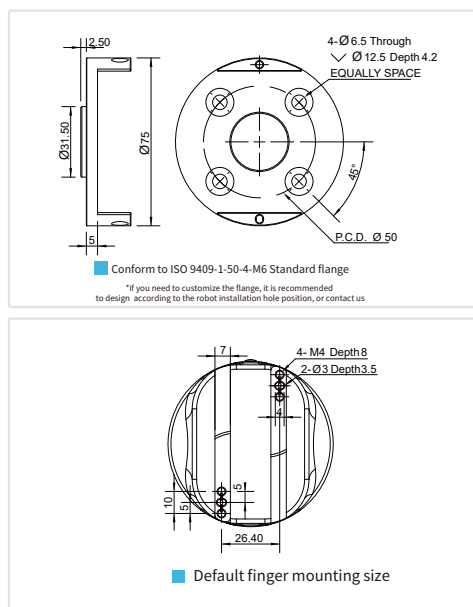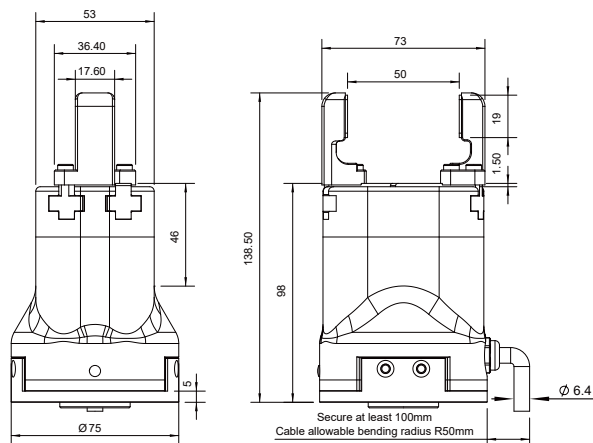

PGC-300-60



Static Vertical Allowable Load

Fz 600 N

Allowable Loading Moment

Mx 15 N·m

My 15 N·m

Mz 15 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion. If you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw)	80~300 N
Stroke	60 mm
Recommended workpiece weight *①	6 kg
Opening/closing time	0.8 s/0.8 s
Repeat accuracy (position)	± 0.03 mm
Noise emission	< 50 dB
Weight	1.5 kg
Driving method	Precise planetary gears + Rack and pinion
Size	178 mm x 90 mm x 90 mm

Working Environment

Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
Rated voltage	24 V DC ± 10%
Rated current	0.4 A
Peak current	2.0 A
IP class	IP 67
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS



Build-in
Controller



Gripping Force
Adjustable



Position
Adjustable



Speed
Adjustable



Drop
Detection






Plug &
Play



Self-locking
Mechanism

Technical Drawings

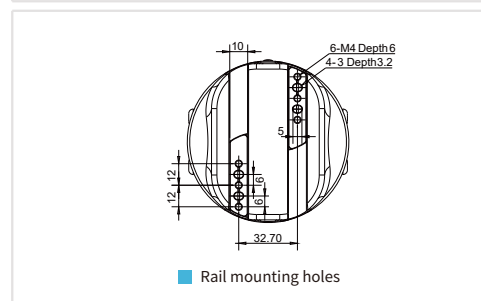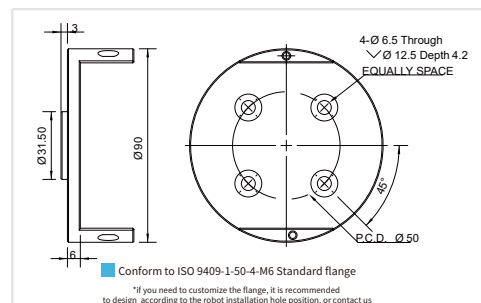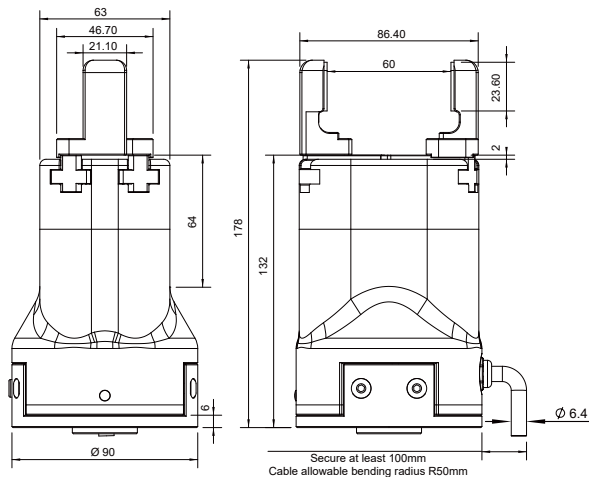

AG Series Electric Adaptive Gripper



reddot award 2019



reddot award 2020

AG-160-95

AG-105-145

DH-3




The AG series is a linkage-type adaptive electric gripper which is independently developed by DH-Robotics. With Plug& Play software many and exquisite structural design, AG series is a perfect solution to be applied with collaborative robots to grip work-pieces with different shapes in different industries.



Installation

1. Bottom installation : use bottom screw holes for installation

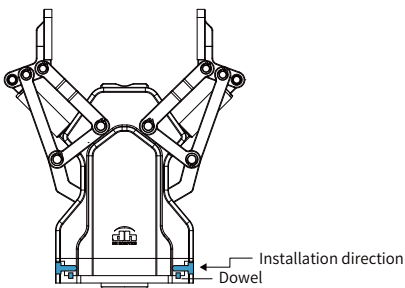

Product Features

● Envelope Adaptive Capture

The gripper linkage mechanism supports envelope adaptive grasping, which is more stable to grip round, spherical or special-shaped objects.

● Plug & Play

It supports plug & play with most collaborative robot brands on the market which is easier to control and program.

● Long Stroke


The biggest stroke of the AG series is up to 145 mm. One gripper can meet the grasping needs of objects of different sizes with good compatibility.



Application

Cooperate with collaborative robot or industrial robot to complete material handling, loading and unloading, assembly, testing, sorting and other tasks in auto parts, automation equipment, new energy and other industries.

AG-160-95

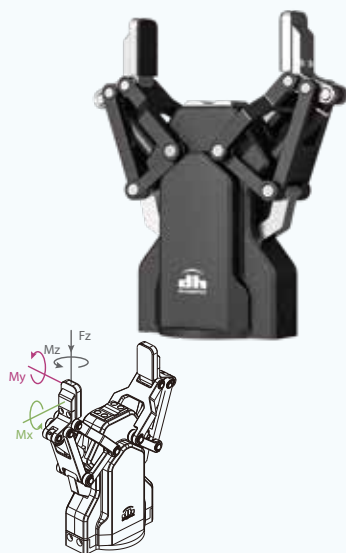

Static Vertical Allowable Load

Fz 300 N

Allowable Loading Moment

Mx 4.75 N·m

My 4.75 N·m

Mz 4.75 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter




Gripping force (per jaw)	45~160 N
Stroke	95 mm
Recommended workpiece weight *①	3 kg
Opening/closing time	0.7 s/0.7 s
Repeat accuracy (position)	± 0.03 mm
Noise emission	< 50 dB
Weight	1 kg
Driving method	Screw drive + Linkage system
Size	184.6 mm x 162.3 mm x 67 mm

Working Environment


Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
Rated voltage	24 V DC ± 10%
Rated current	0.8 A
Peak current	1.5 A
IP class	IP 54
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS

● Build-in Controller	● Gripping Force Adjustable	● Position Adjustable	○ Speed Adjustable	● Drop Detection	● Plug & Play	● Self-locking Mechanism
-----------------------	-----------------------------	-----------------------	--------------------	------------------	---------------	--------------------------

Technical Drawings

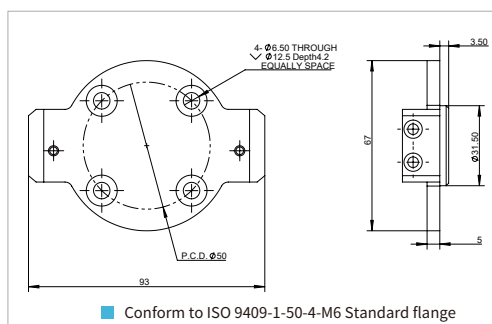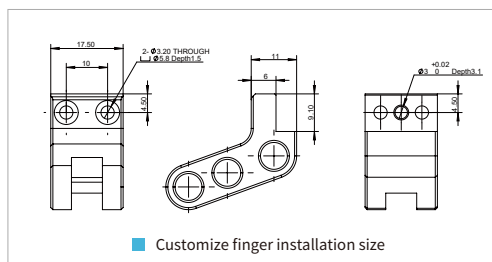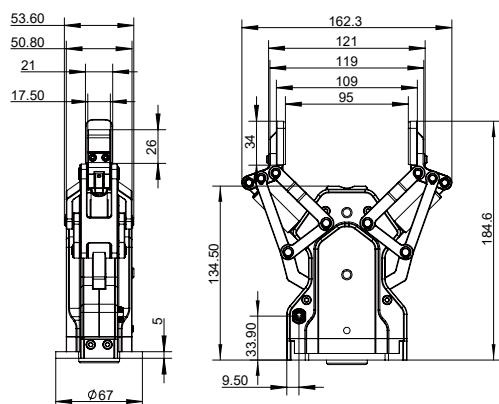

AG-105-145



Static Vertical Allowable Load

Fz 300 N

Allowable Loading Moment

Mx 1.95 N·m

My 1.95 N·m

Mz 1.95 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw)	35~105 N
Stroke	145 mm
Recommended workpiece weight * ①	2 kg
Opening/closing time	0.7 s/0.7 s
Repeat accuracy (position)	± 0.03 mm
Noise emission	< 50 dB
Weight	1.3 kg
Driving method	Screw drive + Linkage system
Size	203.9 mm x 212.3 mm x 67 mm

Working Environment

Communication interface	Standard: Modbus RTU (RS485), Digital I/O Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
Rated voltage	24 V DC ± 10%
Rated current	0.8 A
Peak current	1.5 A
IP class	IP 54
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS



Build-in
Controller



Gripping Force
Adjustable



Position
Adjustable



Speed
Adjustable



Drop
Detection







Plug &
Play




Self-locking
Mechanism

Technical Drawings

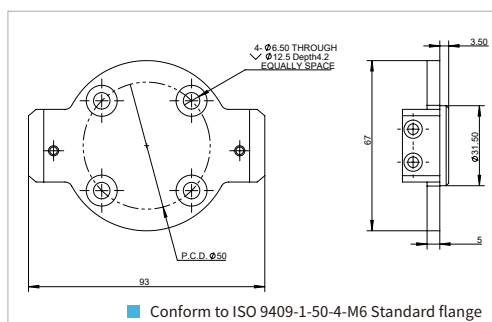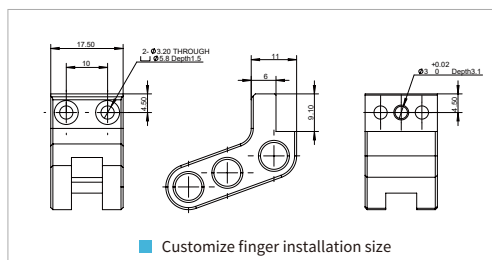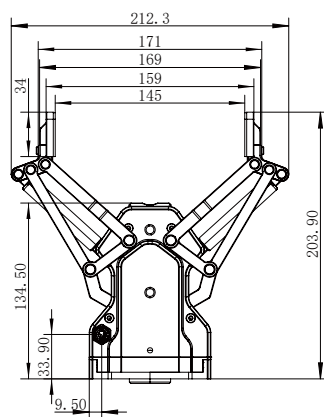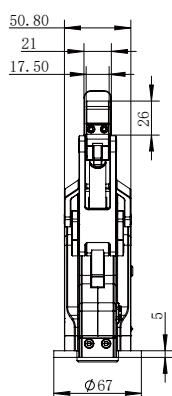

DH-3

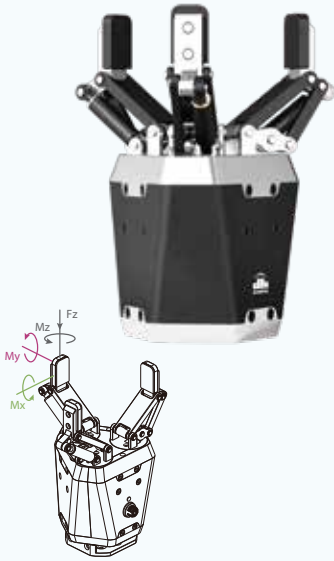

Static Vertical Allowable Load

Fz 150 N

Allowable Loading Moment

Mx 2.5 N·m

My 2 N·m

Mz 3 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw)	10~65 N
Stroke	106 mm (parallel) 122 mm (centric)
Recommended workpiece weight *①	1.8 kg
Opening/closing time	0.7 s/0.7 s
Repeat accuracy (position)	± 0.03 mm
Noise emission	< 50 dB
Weight	1.68 kg
Driving method	Screw nut + gear drive + linkage mechanism
Size	213.5 mm x 170 mm x 118 mm

Working Environment

Communication interface	Standard: TCP/IP, USB2.0, CAN2.0A Optional: EtherCAT* ②
Rated voltage	24 V DC ± 10%
Rated current	0.5 A
Peak current	1 A
IP class	IP 40
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS



Build-in
Controller



Gripping Force
Adjustable



Position
Adjustable



Speed
Adjustable



Drop
Detection





Plug &
Play




Self-locking
Mechanism

Technical Drawings

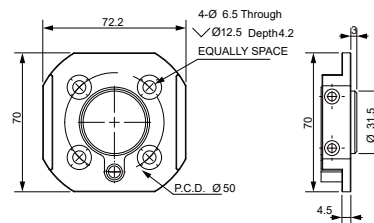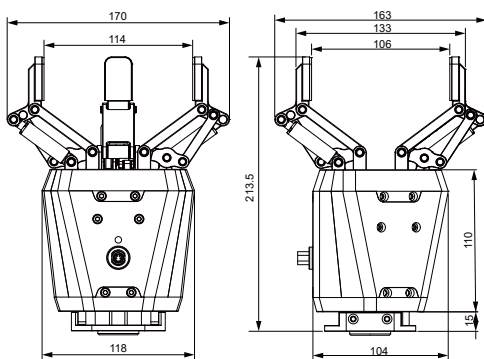

Conform to ISO 9409-1-50-4-M6 Standard flange

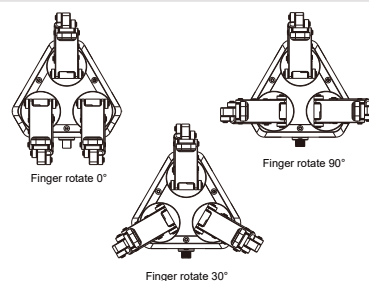

CG Series Electric Centric Gripper

CGE-10-10

CGI-100-170

CGC-80-10




The CG series is a three-finger centric gripper independently developed by DH-Robotics. The three-finger gripping method can better cope with the grasping task of cylindrical workpieces. The CG series is available in a variety of models for a variety of scenarios, stroke and end devices.



Installation

1. Front and rear installation: use front and rear screw holes for installation
2. Side installation: use side screw holes for installation
3. Bottom installation : use bottom screw holes for installation

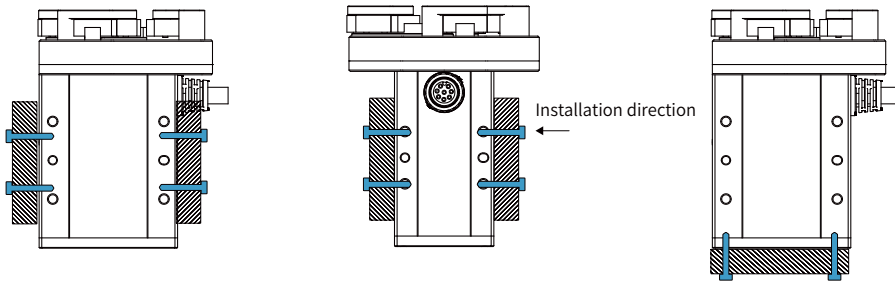

Product Features

● High Performance


Realize high-precision centering and grasping, the process structure meets the requirements of high rigidity, and the energy density exceeds that of similar products

● Long Lifetime

Continuous and stable work above 10 millions times without maintenance.

● Overload Protection


The high-performance servo motor can provide instantaneous overload protection

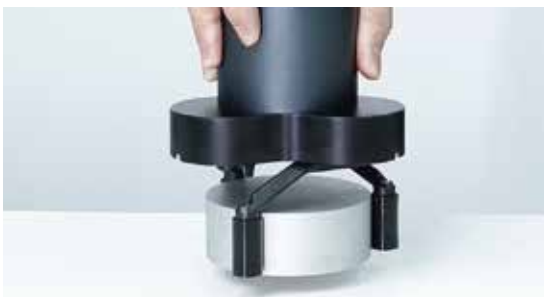

Application

Accurate and stable grasping of cylindrical workpieces in the fields of auto parts, automation equipment, precision machining and assembly, etc.

CGE-10-10

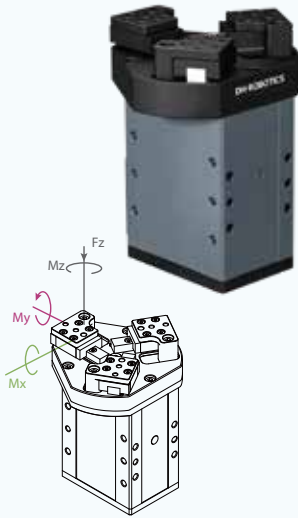

Static Vertical Allowable Load

Fz 150 N

Allowable Loading Moment

Mx 0.62 N·m

My 0.62 N·m

Mz 0.62 N·m

*① It depends on the shape of the grasping object, the material and friction of the contact surface, and the acceleration of the motion, if you have any questions, please contact us.

*② Use optional communication, need external communication conversion box, please consult the sales staff for details

Parameters

Product Parameter

Gripping force (per jaw)	3~10 N
Stroke	10 mm
Recommended workpiece weight *①	0.1 kg
Opening/closing time	0.3 s/0.3 s
Repeat accuracy (position)	± 0.03 mm
Noise emission	< 40 dB
Weight	0.43 kg
Driving method	Precise planetary gear reducer + Rack and pinion
Size	94 mm x 53.5 mm x 38 mm

Working Environment

Communication interface	Standard: Modbus RTU (RS485), Digital I/O interface Optional: TCP/IP, USB2.0, CAN2.0A, PROFINET, EtherCAT *②
Rated voltage	24 V DC ± 10%
Rated current	0.3 A
Peak current	0.6 A
Recommended environment	0~40°C, under 85% RH
Certification	CE, FCC, RoHS



Build-in
Controller



Gripping Force
Adjustable



Position
Adjustable



Speed
Adjustable




Drop
Detection



Self-locking
Mechanism

Technical Drawings

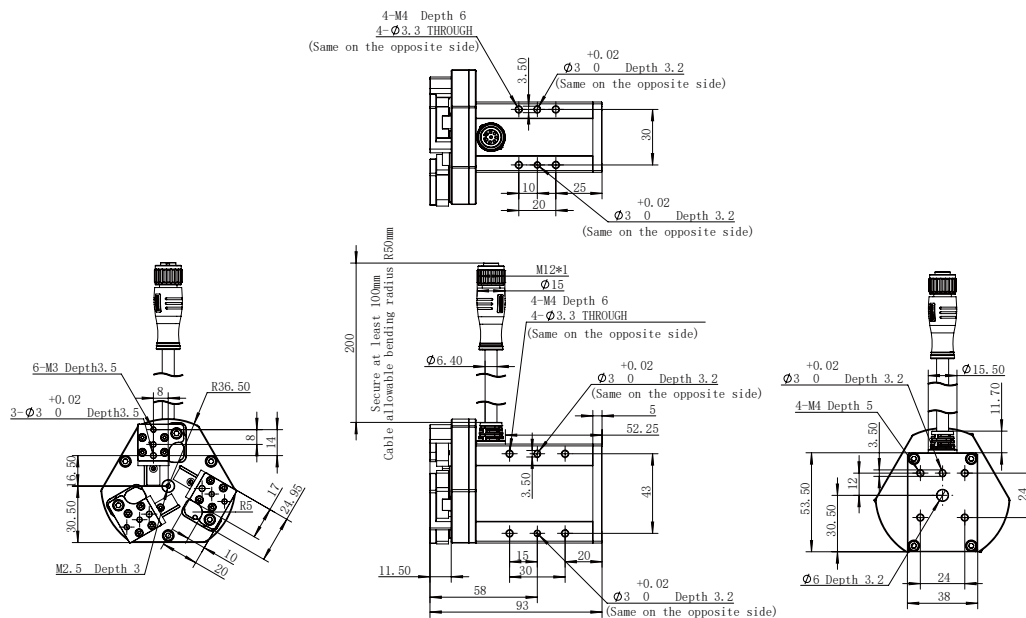

Honors and Certificates

– Some of Our Certificates



1



2



3



4



5



6



7

1. CE Certificate
2. IP Class Certificate
3. RoHS Certificate
4. EMC Certificate
5. FCC Certificate
6. Low Temperature Test Report
7. Intellectual Property Management System Certification


Our Customers

More than 500 customers around the world are using DH-Robotics products
The number of customers continues to grow rapidly...



Our Eco-Partners

DH-Robotics is a high-quality partner of global collaborative robots

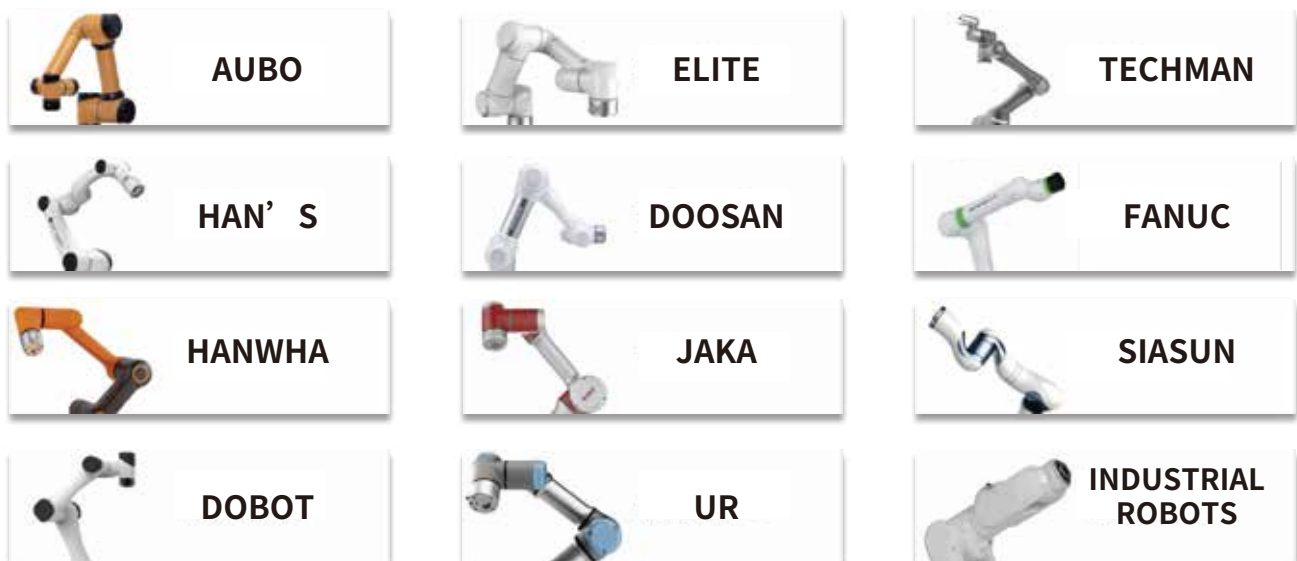



DH-Robotics Technology Co.,Ltd.

Linked  |  **YouTube** [Search DH-Robotics](#)

EN-3.2.2022.09

en.dh-robotics.com

info@dh-robotics.com

A507, Industrialization building, Yuexing 3rd Road, Nanshan district, Shenzhen, China, 518063